


Data Sheet Static Clean

Name STATIC CLEAN
Description Nickel coated fabric



Wire/cm (Warp)	70
Insertions/cm (Weft)	47
Type of raw material	Polyester fabric
Roll width	50 +/- 2 cm
Surface resistivity	Max Average 0.4 Ohm/sq
Product applications	Base material for room shielding, base material for EMI/RFI
Temperature range	-40°C to 90°C
Nickel amount	20 g/mq
Total Weight	150 +/- 15 g/mq
Manufacturing Specification	PRD2_Metallization Process Specification ED.2 - 13/06/13

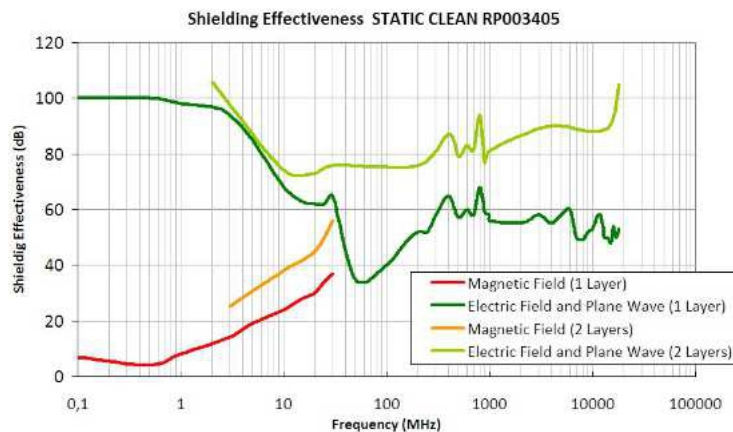

Other characteristics

NA